



Configured LDSBus Sensor /
Actuator devices can be connected
to the IoTPortal Gateway
Let's Get Started!


Please visit
or scan the QR code for warranty
registration with the UUID and
Product Key below

[https://brtsys.com/
warranty](https://brtsys.com/warranty)
STICKER
AREA



Step 1.

Connect the LDSBus Quad T-Junction to the IoTPortal Gateway LDSBus port using RJ45(Cat5e) cable.

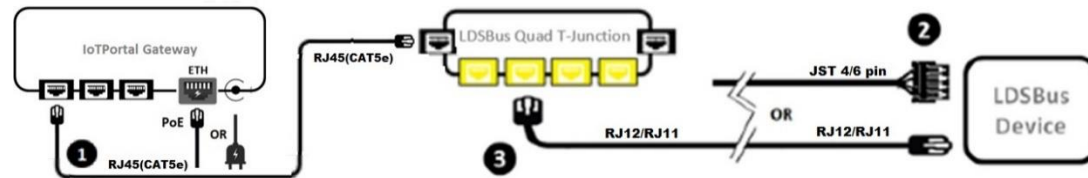

Step 2.

Connect one end of the cable provided to the LDSBus device if required.

Step 3.

Connect the other end of the cable to the LDSBus Quad T-Junction at LDSU port using RJ12/RJ11 cable

Step 4.

Download and install the IoTPortal Mobile app from Google Play Store or App Store.



Step 5.

Using the IoTPortal Mobile app or Web Management Console (www.iotportal.com); Scan and add the LDSBus Device to IoTPortal Gateway.

Step 6.

For more detailed instructions, documentation, how-to guides on IoTPortal Gateway and the software application, please visit:

<https://brtsys.com/resources/>

