



2CH Relay & 2CH Relay + iSENSE Datasheet



1 Introduction

LDSBus 2CH Relay and the LDSBus 2CH Relay + iSENSE incorporate 2 relay controllers that have high load current handling capacity of 16A. These relays can switch both AC and DC loads. The LDSBus 2CH Relay + iSENSE version has 2 additional current sensors which can each monitor up to 20A of current. The unique latching feature of these relays are ideal in applications where relays must maintain their state despite a power loss until the next state reset.

The LDSBus 2CH Relay controllers are ideal for usage in forward and reverse motor control applications, switching on and off high-power loads and additionally perform load sensing simultaneously (iSENSE option).

1.1 Features

- 2 Channel dual coil latching SPDT Relay
- Supports up to 16A load per relay channel
- Current sense monitoring up to $\pm 20A$ (iSENSE option)
- Relays may be individually switched to Normally Open (NO) or Normally Closed (NC)
- Supports both AC (250V) and DC (300V) load switching
- Maintains relay state through a bus power loss
- Supports the BRTSys LDSBus protocol
- Low power consumption
- Operating temperature range: 0°C to +55°C
- Flush mount and DIN Rail mounting options
- Supported Platforms:
 - PanL Smart Living
 - IoTPortal
 - LDSBus Python SDK
 - LDSBus .NET SDK

Visit <https://brtsys.com/resources/> for more information.



Neither the whole nor any part of the information contained in, or the product described in this manual, may be adapted, or Reproduced in any material or electronic form without the prior written consent of the copyright holder. This product and its documentation are supplied on an as-is basis and no warranty as to their suitability for any particular purpose is either made or implied. BRT Systems Pte Ltd (BRTSys) will not accept any claim for damages howsoever arising as a result of use or failure of this product. Your statutory rights are not affected. This product or any variant of it is not intended for use in any medical appliance, device, or System in which the failure of the product might reasonably be expected to result in personal injury. This document provides preliminary information that may be subject to change without notice. No freedom to use patents or other intellectual property rights is implied by the publication of this document. BRT Systems Pte Ltd, 1 Tai Seng Avenue, Tower A, #03-01 Singapore 536464. Singapore Registered Company Number: 202220043R.

2 Part Numbers/Ordering Information

Part#	Description
LC-0111-01A	LDSBus 2CH Relay
LC-0101-01A	LDSBus 2CH Relay + iSENSE
LA-0501-01A	LDSBus RJ11-RJ11 Cable (5m)
LA-1201-01A	LDSBus DIN Rail Mount Set

Table 1 - Part Numbers / Ordering Information

Table of Contents

1	Introduction	1
1.1	Features.....	1
2	Part Numbers/Ordering Information	2
3	Specifications	4
4	FCC Compliance Statement	6
5	Hardware Features	7
6	Relay Actuator Configuration and Installation	10
6.1	Connection Diagram.....	10
7	Mounting Instructions	11
7.1	Flush Mount	11
7.2	DIN Rail Mount.....	11
8	Terminal Wiring Instruction Relay Channel/ iSENSE Channel	12
8.1	Latch Relay (RL1-RL2) Setup	13
8.2	iSENSE (SEN1~SEN2) Setup.....	14
9	Mechanical Dimensions	16
10	System Status LED Indicators	17
11	Relay Channel Status LED Indicators	18
12	Contact Information	19
Appendix A – References	20	
Document References	20	
Acronyms and Abbreviations	20	
Appendix B - List of Figures and Tables	21	
List of Figures	21	
List of Tables	21	
Appendix C – Revision History	22	

3 Specifications

Features	Interface	RS485
	System Status Indicator	1x RGB LED
	Relay Status Indicator	2x Red LEDs
	*Power/Sensing Indicator	1x Green LED
	Mounting	Flush Mount DIN Rail Mount
Power	Device Input Voltage	5V DC Bus Power
	Power (Relay+ iSENSE)	Typ: 300mW Max:485mW
	Power (Relay)	Typ: 110mW Max:320mW
Relay	Number of Relay Channel	2
	Relay Type	SPDT, Dual Coil Latching
	Contact arrangement	1 Form C SPDT-CO
	Rated voltage	≤ 250VAC
	Max. switching voltage	400VAC
	Rated current	16A
	Limiting continuous current	16A, UL **:20A
	Mechanical endurance	>5x10 ⁶ operations
	Max. DC load breaking capacity	Refer to Figure 1
	Electrical endurance	Refer to Figure 1
Current Sense*	Number of Current Channel	2
	Type of current for monitoring	AC/DC
	Primary current (I _{pm})	-20A ~ 20A
	Measurable line frequency	50Hz/60Hz
	Resolution	0.2A
	Accuracy	Typ ±5%; For 0A ~ ±2A, Accuracy typ ±0.2A
	Current Output Quiescent (No current flowing through IP)	-120mA ~ 120mA
	Thermal Offset Drift	Max: ±120mA; Referred to TA=25°C, IP = 0A
Physical Characteristics	Colour	White
	Housing	Polycarbonate
	Dimension	L138.2mm x W76.0mm x H31.9mm
Environmental Limits	Operating Temperature	0 to 55°C
	Storage Temperature	-20 to 85°C
	Ambient Relative Humidity	5 to 95% (non-condensing)
Package Contents	Device	1x LDSBus 2CH Relay / 1x LDSBus 2CH Relay + iSENSE
	Wire Assembly	1x LDSBus RJ11-RJ11 Cable (5m)
Optional	Mounting Accessories	1x LDSBus DIN Rail Mount set

Table 2 - LDSBus 2CH Relay & 2CH Relay + iSENSE Specifications

*Only for LDSBus 2CH Relay + iSENSE

**UL standards are safety benchmarks developed by Underwriters Laboratories (UL), a global safety science company, to ensure products, systems, and services are safe for consumers and the environment.

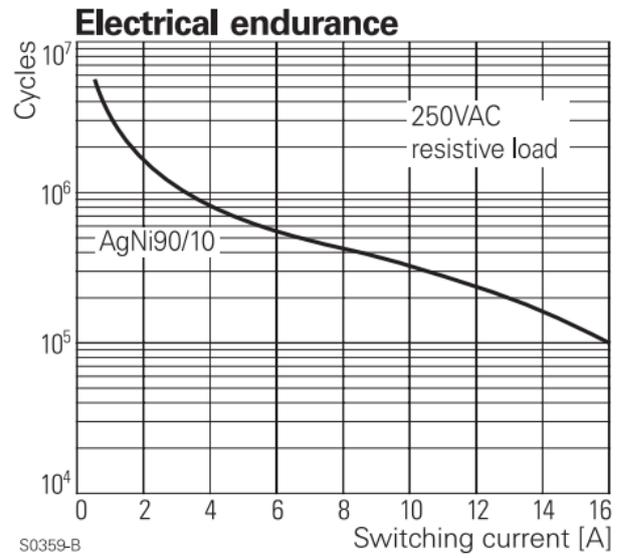
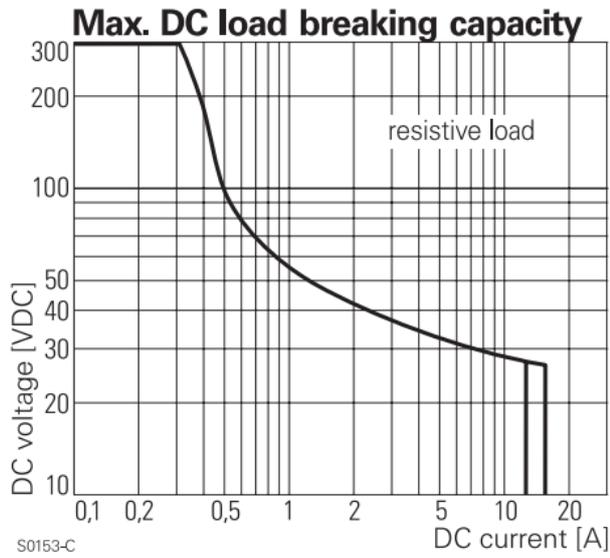


Figure 1 - Max. DC Load Breaking Capacity and Electrical Endurance

4 FCC Compliance Statement

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) These devices may not cause harmful interference, and
- (2) These devices must accept any interference received, including interference that may cause undesired operation.

NOTE: The equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If the equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Re-orient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF exposure guidelines, at least 20cm of separation distance between the device and the user's body must be always maintained.

FCC Radiation Exposure Statement

This device complies with FCC radiation exposure limits set forth for an uncontrolled environment and it also complies with Part 15 of the FCC RF Rules. This equipment must be installed and operated in accordance with provided instructions and the antenna(s) used for this transmitter must be installed to provide a separation distance of at least 20 cm from all persons and must not be co-located or operating in conjunction with any other antenna or transmitter. End-users and installers must be provided with antenna installation instructions and consider removing the no-collocation statement.

Caution

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



5 Hardware Features



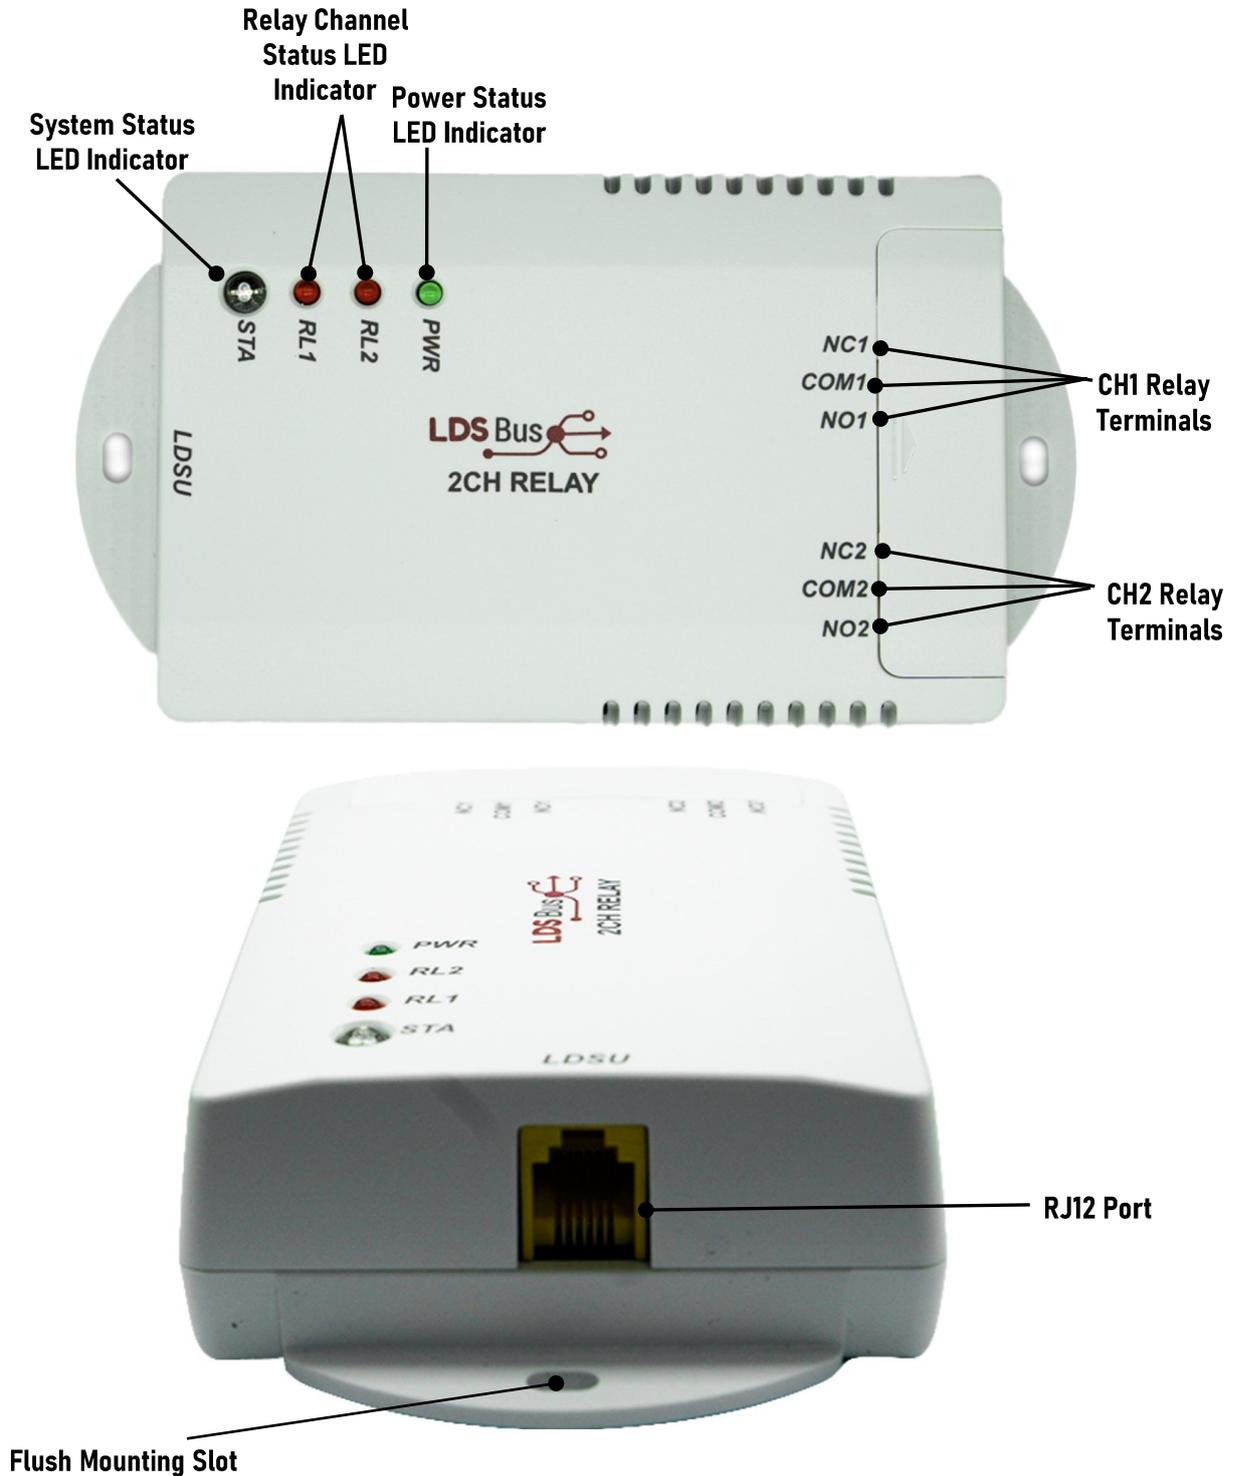


Figure 2 - LDSBus 2CH Relay Hardware Features

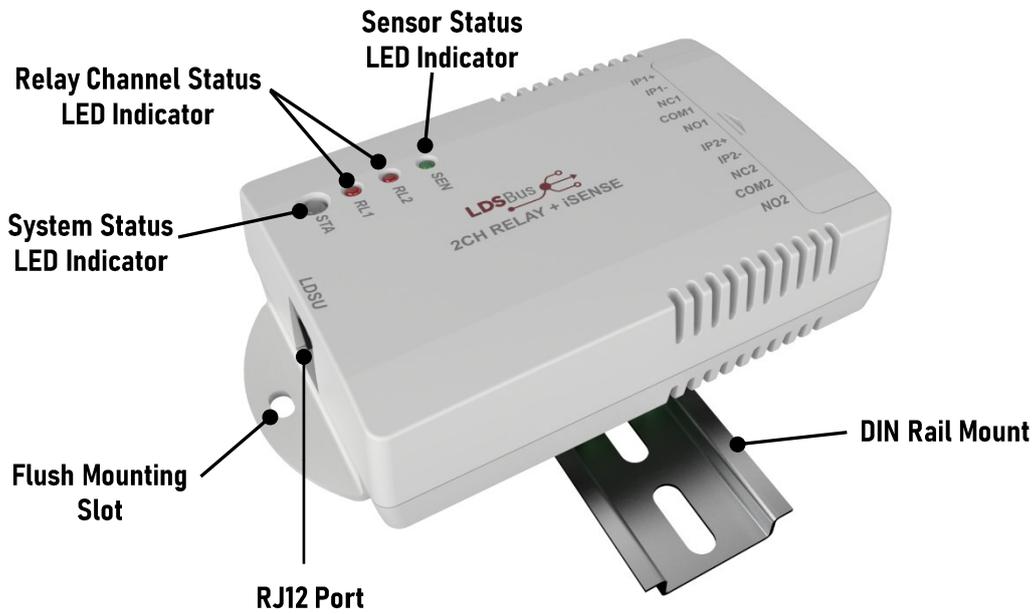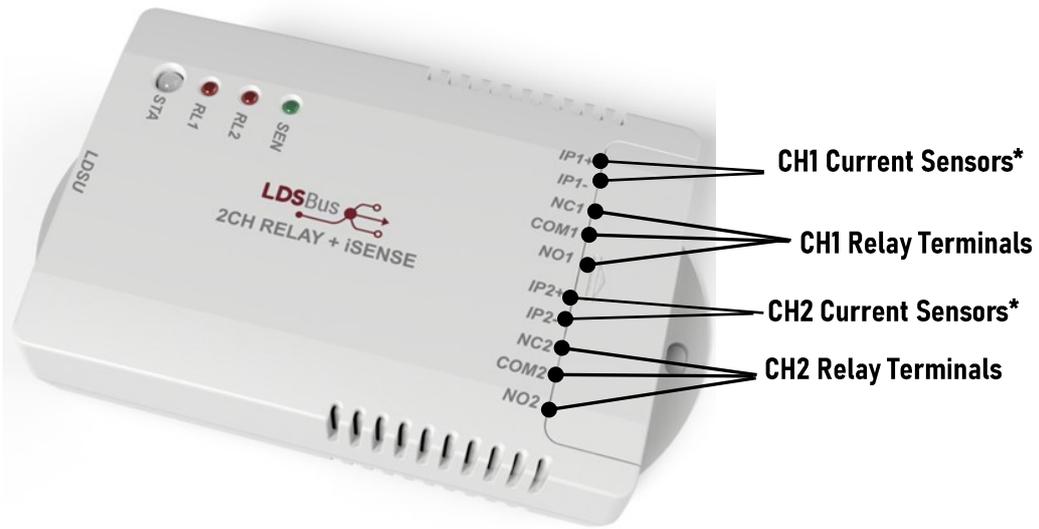

*Applicable only for LDSBus 2CH Relay + iSENSE Model

Figure 3 - LDSBus 2CH Relay + iSENSE Hardware Features

Function	Labels	Description	LDSBus 2CH Relay	LDSBus 2CH Relay + iSENSE
CH1 Relay Terminals	COM1	Channel 1 Relay Common Terminal	Yes	Yes
	NC1	Channel 1 Relay Normally Closed Terminal	Yes	Yes
	NO1	Channel 1 Relay Normally Open Terminal	Yes	Yes
CH2 Relay Terminals	COM2	Channel 2 Relay Common Terminal	Yes	Yes
	NC2	Channel 2 Relay Normally Closed Terminal	Yes	Yes
	NO2	Channel 2 Relay Normally Open Terminal	Yes	Yes
CH1 Current Sensor	IP1+	Channel 1 Current Sensor Positive Terminal*	No	Yes
	IP1-	Channel 1 Current Sensor Negative Terminal*	No	Yes
CH2 Current Sensor	IP2+	Channel 2 Current Sensor Positive Terminal*	No	Yes
	IP2-	Channel 2 Current Sensor Negative Terminal*	No	Yes
Sensor Status LED Indicator	SEN	Power and iSENSE Status LED	No	Yes
Power Status LED Indicator	PWR	Power status LED	Yes	No
Relay Channel Status Indicator	RL1	Relay 1 status LED	Yes	Yes
	RL2	Relay 2 status LED	Yes	Yes
System Status LED Indicator	STA	LDSBus status LED	Yes	Yes
RJ12 Port	LDSU	LDSBus data and power interface port. The physical port is RJ12. The connection interface can be RJ11/RJ12.	Yes	Yes

Table 3 - LDSBus 2CH Relay & LDSBus 2CH Relay + iSENSE Hardware Features

6 Relay Actuator Configuration and Installation

Please refer to [LDSBus Configuration Utility User Guide](#) on how to configure the device name, address, and termination settings before using it for your application.

6.1 Connection Diagram

Figure 4 illustrates the connection of the LDSBus Relay (LDSBus Device) to the LDSBus. Please visit <https://brtsys.com/resources> to view the full device application, setup and installation guides.

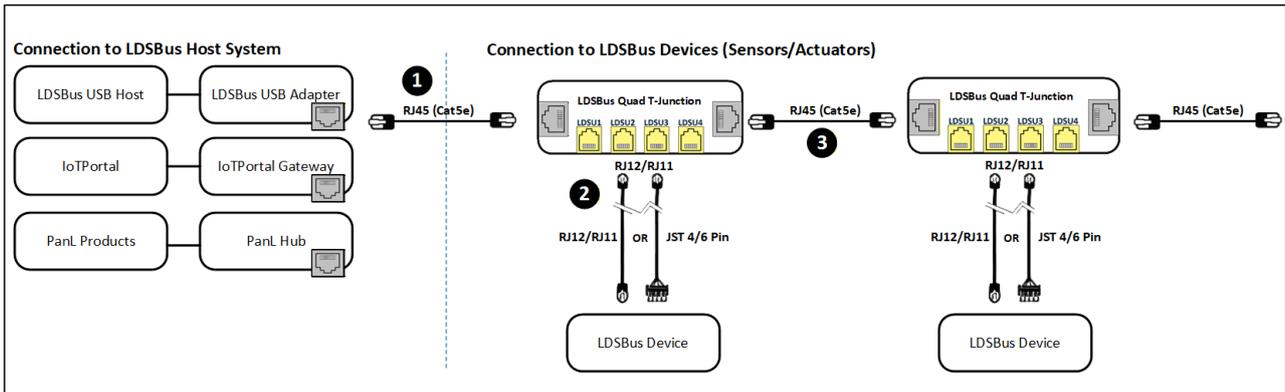


Figure 4 - Connection Diagram

Setup Instructions:

1. Connect the first LDSBus Quad T-Junction to any of the LDSBus Host System using a RJ45(CAT5e) cable as shown in Figure 4.
2. Connect the configured LDSBus Relay to the LDSBus Quad T-Junction as shown in Figure 4.
3. If there is more than one LDSBus Quad T-Junction, chain them together as shown in Figure 4.

Enable termination for the last device in LDSBus.

7 Mounting Instructions

7.1 Flush Mount

The LDSBus Relay can be flush mounted directly on a wall or any flat surface using 2 M3.5*16mm (thread) screws.



Figure 5 - LDSBus 2CH Relay & 2CH Relay + iSENSE Flush Mount

7.2 DIN Rail Mount

The LDSBus Relay can be mounted on a DIN Rail using the LDSBus DIN Rail Mount set. This set is optional and includes the bracket and mounting screws. Refer to [Table 1](#) for Part #.



Figure 6 - LDSBus 2CH Relay & 2CH Relay + iSENSE DIN Rail Mount

8 Terminal Wiring Instruction Relay Channel/ iSENSE Channel

Connections are made with Push-in CAGE CLAMP technology. If using solid conductor wire / clamp with insulation ferrule, the stripped conductor is easily inserted into the clamp until it hits the backstop without the need for a screwdriver. To remove cable from connector, only use flat head screwdriver to press the push buttons and pull out the wire as shown in Figure 7.

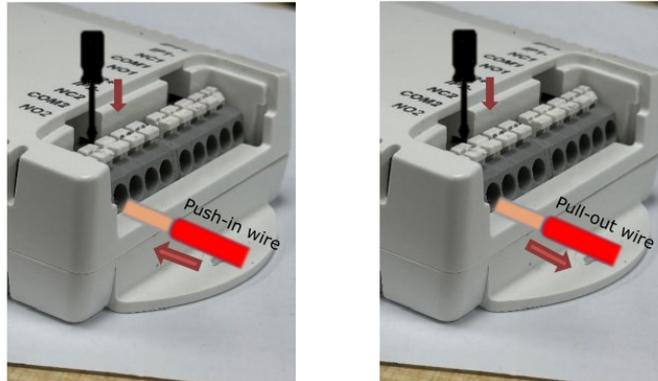


Figure 7 - Push-in wire & Pull-out wire

Table 4 provides a list of American Wire Gauges (AWGs) that can be used in Terminal Blocks.

Conductor Type	Wire diameter/AWG
Solid conductor	0.25~2.5mm ² /20~12 AWG
Stranded conductor	0.25~2.5mm ² /20~12 AWG
Stranded conductor; with insulated ferrule	0.25~1.5mm ²

Table 4 - AWG to use in Terminal Block

As shown in Figure 8, the wire strip is 8mm to 12mm long.


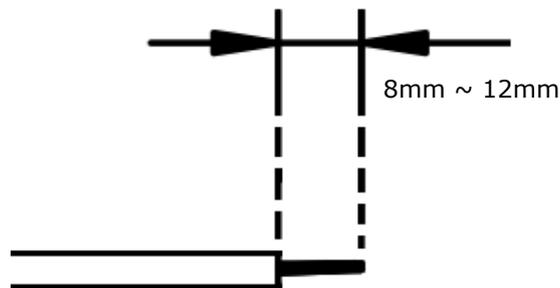


Figure 8 - Wire Strip Length

8.1 Latch Relay (RL1-RL2) Setup

The Latch Relay (RL1-RL2) support AC and DC loads and can manage 250V/16A rating AC load per relay. The following are the two connection options:

Devices Normally Open (NO)

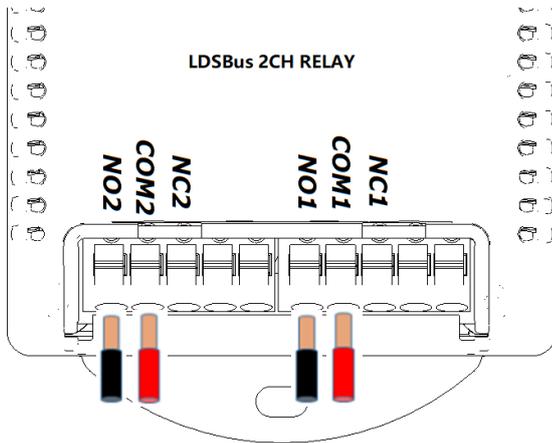

Use AWG 20~12; A RED wire indicates that it comes from an AC/DC Source


→ Connect to the COM PIN



Use AWG 20~12; The BLACK wire indicates that it comes from an electrical device

→ Connect to NO PIN

Devices Normally Closed (NC)

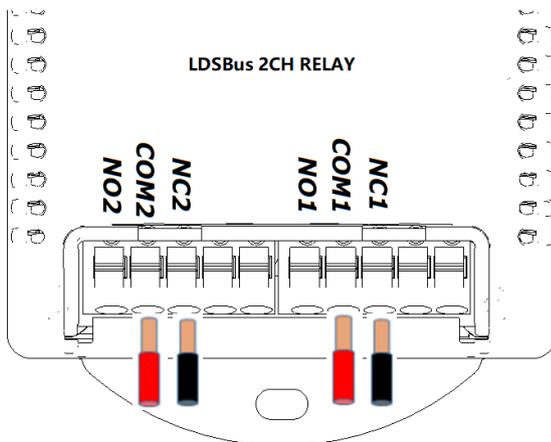

Use AWG 20~12; A RED wire indicates that it comes from an AC/DC Source

→ Connect to the COM PIN



Use AWG 20~12; The BLACK wire indicates that it comes from an electrical device

→ Connect to NC PIN


WARNING: When wiring, always TURN OFF the Power Supply.

8.2 iSENSE (SEN1~SEN2) Setup

iSENSE supports bi-directional current sense monitoring up to $-20A \sim +20A$ per channel. The following are the three connections options:

Note: Each channel is independent and so Channel 1 and Channel 2 can use a different configuration.

Standalone Sensing Monitoring

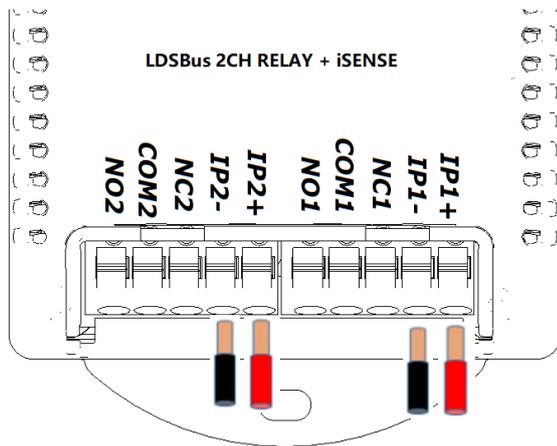


Use AWG 20~12; A RED wire indicates that it comes from an AC/DC Source
→ Connect to the IP+ PIN



Use AWG 20~12; The BLACK wire indicates that it comes from an electrical device
→ Connect to IP- PIN

Sensing Monitoring with RELAY Devices Normally Open (NO)

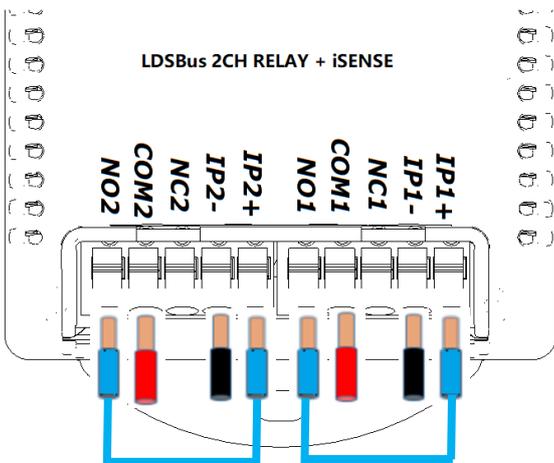

Use AWG 20~12; A RED wire indicates that it comes from an AC/DC Source
→ Connect to the COM PIN




Use AWG 20~12; The BLACK wire indicates that it comes from an electrical device
→ Connect to IP- PIN



Use AWG 20~12; BLUE
Connect to NO PIN
→ Connect to IP+ PIN

Sensing Monitoring with RELAY Devices Normally Closed (NC)

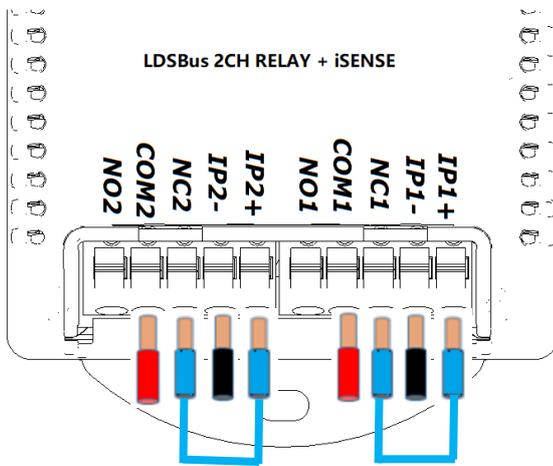

Use AWG 20~12; A RED wire indicates that it comes from an AC/DC Source

→ Connect to the COM PIN



Use AWG 20~12; The BLACK wire indicates that it comes from an electrical device

→ Connect to IP- PIN



Use AWG 20~12; BLUE

Connect to NC PIN

→ Connect to IP+ PIN

For more information on the connection/wiring diagrams, refer to [Relay Controller Application Note](#).

9 Mechanical Dimensions

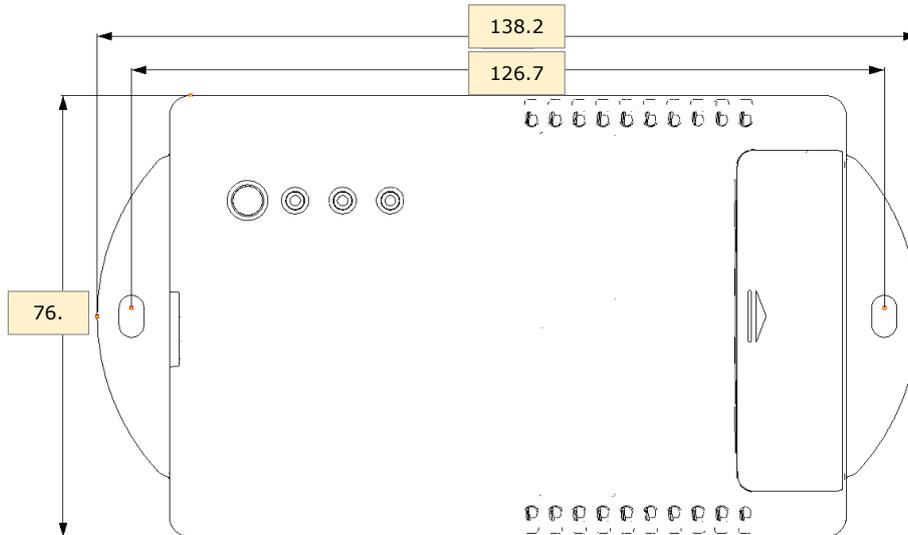


Figure 9 - LDSBus 2CH Relay & 2CH Relay + iSENSE Dimension - Top View

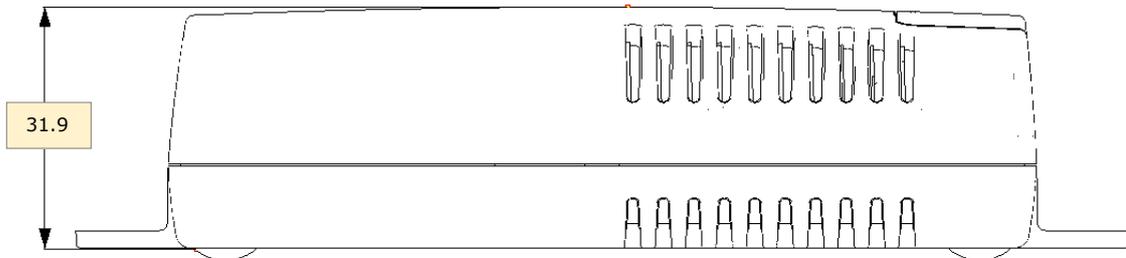


Figure 10 - LDSBus 2CH Relay & 2CH Relay + iSENSE Dimension - Side View

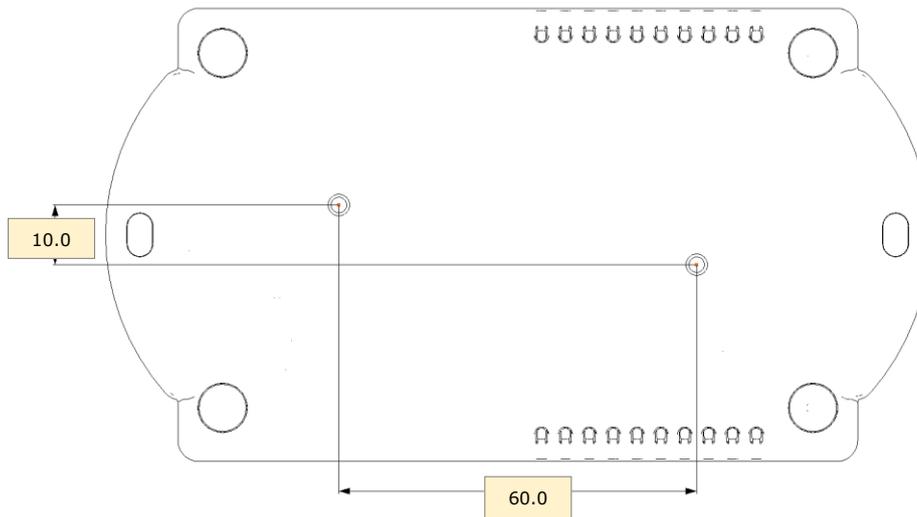


Figure 11 - LDSBus 2CH Relay & 2CH Relay + iSENSE Dimension - Bottom View

Note: All dimensions are in millimetres.

10 System Status LED Indicators

LDSU devices come with a tri-color LED, and LED status are mentioned in the table below.

Status display colors:

- | | | | |
|----|--------|---|--|
| 1. | RED | - | Device in error condition |
| 2. | YELLOW | - | Un-configured device |
| 3. | GREEN | - | Device in normal state (Device termination is OFF) |
| 4. | BLUE | - | Device in normal state (Device termination is ON) |

Device Status	LED Color		Flashing Frequency	Description
Un-configured device	YELLOW		LED flashing @1Hz	Un-configured device with factory default address (126)
Configured device	GREEN		Steady – Non-flashing	Configured device (Device ID 1-125) and device is idle.
	BLUE			
Addressed device	GREEN		LED flashing @5Hz	Device is busy communicating.
	BLUE			
Identified device	GREEN		LED flashing @1Hz	Device in identify state.
	BLUE			
Device error	RED		Steady – Non-flashing	Device error has occurred.
Firmware update	YELLOW		Steady – Non-flashing	Device firmware update.

*Applicable only for LDSBus 2CH Relay + iSENSE Model

Table 5 - System Status LED Indicators

11 Relay Channel Status LED Indicators

There are 2 channel status LEDs. RL1 indicates the status of relay channel 1 and RL2 indicates the status of relay channel 2.

Device Status	LED Color		Description
RL1	OFF		COM-NC
	Red		COM-NO
RL2	OFF		COM-NC
	Red		COM-NO
PWR	Green		2CH Relay Power is ON
SEN*	Green		2CH Current Sensing is ON

Table 6 - Relay Channel Status LED Indicators

*Applicable only for LDSBus 2CH Relay + iSENSE Model

12 Contact Information

Refer to <https://brtsys.com/contact-us/> for contact information.

System and equipment manufacturers and designers are responsible to ensure that their systems, and any BRT Systems Pte Ltd (BRTSys) devices incorporated in their systems, meet all applicable safety, regulatory and system-level performance requirements. All application-related information in this document (including application descriptions, suggested BRTSys devices and other materials) is provided for reference only. While BRTSys has taken care to assure it is accurate, this information is subject to customer confirmation, and BRTSys disclaims all liability for system designs and for any applications assistance provided by BRTSys. Use of BRTSys devices in life support and/or safety applications is entirely at the user's risk, and the user agrees to defend, indemnify, and hold harmless BRTSys from any and all damages, claims, suits, or expense resulting from such use. This document is subject to change without notice. No freedom to use patents or other intellectual property rights is implied by the publication of this document. Neither the whole nor any part of the information contained in, or the product described in this document, may be adapted, or reproduced in any material or electronic form without the prior written consent of the copyright holder. BRT Systems Pte Ltd, 1 Tai Seng Avenue, Tower A, #03-01, Singapore 536464. Singapore Registered Company Number: 202220043R.

Appendix A – References

Document References

[LDSBus Configuration Utility User Guide](#)

[LDSBus Python SDK V3.0.0 Guide](#)

[LDSBus .Net SDK V3.0.0 Guide](#)

[Relay Controller Application Note](#)

Acronyms and Abbreviations

Terms	Description
AC	Alternating Current
AWG	American Wire Gauges
DC	Direct Current
IoT	Internet of Things
LED	Light Emitting Diode
LDSBus	Long Distance Sensor Bus

Appendix B - List of Figures and Tables

List of Figures

Figure 1 - Max. DC Load Breaking Capacity and Electrical Endurance.....	5
Figure 2 - LDSBus 2CH Relay Hardware Features.....	7
Figure 3 - LDSBus 2CH Relay + iSENSE Hardware Features	8
Figure 4 - Connection Diagram	10
Figure 5 - LDSBus 2CH Relay & 2CH Relay + iSENSE Flush Mount.....	11
Figure 6 - LDSBus 2CH Relay & 2CH Relay + iSENSE DIN Rail Mount	11
Figure 7 - Push-in wire & Pull-out wire.....	12
Figure 8 - Wire Strip Length	12
Figure 9 - LDSBus 2CH Relay & 2CH Relay + iSENSE Dimension – Top View	16
Figure 10 - LDSBus 2CH Relay & 2CH Relay + iSENSE Dimension – Side View.....	16
Figure 11 - LDSBus 2CH Relay & 2CH Relay + iSENSE Dimension – Bottom View.....	16

List of Tables

Table 1 - Part Numbers / Ordering Information.....	2
Table 2 - LDSBus 2CH Relay & 2CH Relay + iSENSE Specifications.....	4
Table 3 - LDSBus 2CH Relay & LDSBus 2CH Relay + iSENSE Hardware Features.....	9
Table 4 - AWG to use in Terminal Block	12
Table 5 - System Status LED Indicators	17
Table 6 - Relay Channel Status LED Indicators	18

Appendix C – Revision History

Document Title: LDSBus 2CH Relay & 2CH Relay + iSENSE Datasheet
 Document Reference No.: BRTSYS_000008
 Clearance No.: BRTSYS#007
 Product Page: <https://brtsys.com/ldsbus/>
 Document Feedback: [Send Feedback](#)

Revision	Changes	Date
Version 1.0	Initial Release	06-12-2021
Version 1.1	Updated release under BRT Systems	15-09-2022
Version 1.2	Updated the description for device status Relay 1 & Relay 2 in Table 3- LDSBus Relay – System Status LED Indicator -> Description column	24-03-2023
Version 1.3	Updated the following: HVT references to Quad T-Junction; Singapore address	11-09-2023
Version.1.4	Updated Section 1. Introduction and Section 1.1. Features	26-06-2024
Version 1.5	Updated Section 3. Specifications	04-09-2024
Version 1.6	Updated from "2 Channel single coil" to "2 Channel dual coil" in Section 1.1 - Features point#1 Updated caption for Figure 7,8 Added size in Figure 8 Updated the part numbers (inserted a dash "-" in between the part numbers) Appendix A – References > Document References - updated	12-01-2026